


LQD-PUR GP PRIMER

LQD-PUR GP Primer is a fast-curing general-purpose primer designed to optimise adhesion of LQD-PUR Liquid Waterproofing to a range of common roof surfaces. It can reduce project time due to its fast-drying characteristics and simple application method. LQD-PUR GP Primer requires no specialist tools and is simply applied to the surface with a brush or roller.

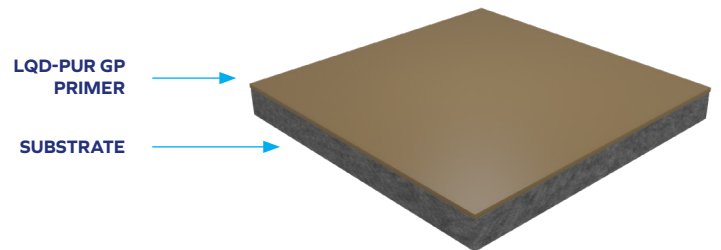

Benefits

Simplicity: One primer for multiple substrate types.

Increased Adhesion: Improves adhesion of LQD-PUR Liquid Waterproofing to a range of common roof surfaces.

Economical: Enables many existing roofs to be overlaid without the need to remove.

Increased Adhesion

Based on high-performance polyurethane technology, LQD-PUR GP Primer enhances the adhesion characteristics of a range of roof surfaces including bituminous substrates (existing membranes/liquid applied Bitumen) and concrete, enabling direct overlay and extension of roof service life.

Simplicity

Developed specifically for improving the adhesion properties of LQD-PUR Liquid Waterproofing to many existing & new roof substrates. No mixing required and applied with a brush or roller, LQD-PUR GP Primer requires no specialist tools to use.

Economical

Coverage rates of up to 20m² / litre for economical application. Applied with a brush or roller for fast application, and a cure time from as little as 90 minutes allows roofs to be made watertight in short timeframes. Reduced project times and completing within schedule is critical to professional roofing contractors.

Preparation

1. Test target surface to ensure substrate compatibility.
2. Ensure all surfaces to be primed are clean, dry and free from contamination prior to application.

Application

1. Ensure any cracks in the surface are sealed with an appropriate polyurethane based mastic.
2. Apply LQD-PUR GP Primer with a brush or roller, ensuring a uniform coverage of the substrate is achieved.
3. Allow primer to fully cure before applying LQD-PUR Liquid Waterproofing (90 minutes dependent on ambient temperature).

Technical Data

LQD-PUR GP Primer Base Material	Polyurethane
Appearance	Brown
Application Temperature	5 - 30°C
Temperature Resistance Range	-30 - 140°C
Expected Cure Time (Per Coat) at 20°C	90 Minutes
Shelf Life	12 Months
Storage Temperature	5 - 25°C
Coverage	20m ² / Litre
Unit Size	5 Litres
Compatible Substrates	Aged Bitumen Felt Aged Asphalt Cured Concrete

Notes

Suitability: Please contact Flex-R if you have any questions regarding specific substrates and their preparation.

Substrate Quality: The substrate must be solid and in a suitable condition prior to adhering and be able to resist any wind uplift forces.

Storage and Handling: The product should be stored unopened in a dry condition at a temperature of 5-25°C. This will ensure the stated shelf life. The product will have a limited life once the container is opened.

Temperature and Timings: All information on temperature and timings represents normal working conditions and is provided as a guideline only.

Disclaimer: Flex-R has taken care to ensure that the information provided in the literature is correct and up to date. However, it is not intended to form any part of a contract or provide a guarantee. Purchasers/intending purchasers should contact Flex-R to verify whether there have been any changes to the provided information since publication of the literature. Please ensure you have read the hazard labels and safety data sheet before using this product.