


LQD-PUR METAL PRIMER

High-performance primer designed to optimise adhesion of LQD-PUR Liquid Waterproofing to a range of metal substrates. LQD-PUR Metal Primer provides excellent adhesion to steel, galvanised steel and non-ferrous metals. LQD-PUR Metal Primer requires no specialist tools and is simply applied to the surface with a brush or roller.

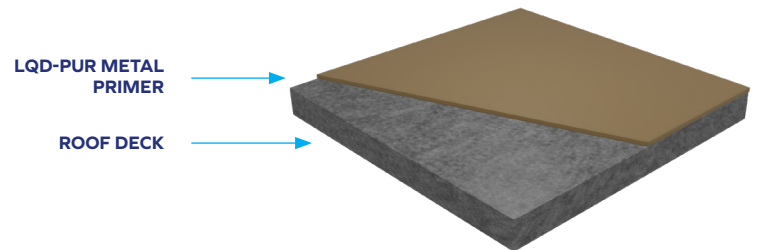

Benefits

Simplicity: One primer for multiple metal types.

Increased Adhesion: Improves adhesion to a range of metal roof substrates.

Long Term Performance: Anti corrosive properties enhance the longevity of the roof surface.

Simplicity

Flex-R's LQD-PUR Metal Primer helps reduce installation time. LQD-PUR Metal Primer eliminates the need to labour intensive metal preparation. Its compatibility with common metal roofing materials simplifies the process of determining correct primer type and can be applied to a wide range of metal roof surfaces, including steel, galvanised steel and non-ferrous metals.

Increased Adhesion

LQD-PUR Metal Primer promotes the adhesion properties of LQD-PUR Liquid Waterproofing to common metals found on roofs, enabling direct overlay and extension of roof service life.

Long Term Performance

LQD-PUR Metal Primer's anti-corrosive properties helps increase the protection provided to metal roof substrates by inhibiting corrosion of the surface it's applied to.

Preparation

1. Thoroughly mix the contents of part A & B as supplied.
2. Test target surface to ensure substrate compatibility.
3. Ensure all surfaces to be primed are clean, dry and free from contamination and loose material prior to application.

Application

1. Apply LQD-PUR Metal Primer with a brush or roller, ensuring a uniform coverage of the substrate is achieved.
2. Allow primer to fully dry before applying LQD-PUR Liquid Waterproofing (20-60 minutes dependent on ambient temperature).

Technical Data

LQD-PUR Metal Primer Base Material	Epoxy
Appearance	Beige
Application Temperature	5 - 30°C
Temperature Resistance Range	-30 - 140°C
Expected Cure Time (Per Coat) at 20°C	20 - 60 Minutes
Shelf Life	12 Months
Storage Temperature	5 - 25°C
Coverage	50 - 75m ² / Kit
Unit Size	Part A: 5 Litres / Part B: 0.5 Litres
Compatible Substrates	Steel Galvanised Steel Aluminium Copper Zinc Lead

Notes

Suitability: Please contact Flex-R if you have any questions regarding specific substrates and their preparation.

Substrate Quality: The substrate must be solid and in a suitable condition prior to adhering and be able to resist any wind uplift forces.

Storage and Handling: The product should be stored unopened in a dry condition at a temperature of 5-25°C. This will ensure the stated shelf life. The product will have a limited life once the container is opened.

Temperature and Timings: All information on temperature and timings represents normal working conditions and is provided as a guideline only.

Disclaimer: Flex-R has taken care to ensure that the information provided in the literature is correct and up to date. However, it is not intended to form any part of a contract or provide a guarantee. Purchasers/intending purchasers should contact Flex-R to verify whether there have been any changes to the provided information since publication of the literature. Please ensure you have read the hazard labels and safety data sheet before using this product.