


## LQD-PUR REACTIVATOR

LQD-PUR Reactivator is a fast-curing PU primer, specifically designed to reactivate existing PU liquid coatings. It can be applied to surfaces already coated with the LQD-PUR Liquid Waterproofing System if the standard over-coating window has been exceeded. It can enable the repair of roof damage or for the application of further coats on multi-layer systems. LQD-PUR Reactivator is easy to apply with a brush or roller due to its low viscosity and provides excellent coverage rates.

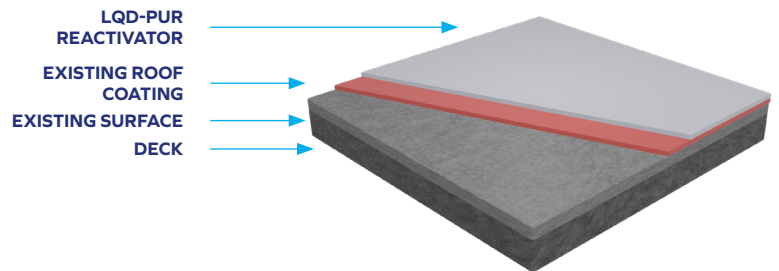

### Benefits

**Increased Adhesion:** Improves inter-layer adhesion between cured PUR coating and following coats.

**Simplicity:** Brush or roller applied.

**Economical:** Enables roof repairs and further coats with reduced labour requirement.

### Simplicity

No mixing required and applied with a brush or roller, LQD-PUR Reactivator requires no specialist tools to use.

### Increased Adhesion

Based on high-performance polyurethane technology, LQD-PUR Reactivator enhances the adhesion characteristics of cured PU coatings, allowing roof repairs, and further coats of LQD-PUR Liquid Waterproofing System to be applied if the standard over-coating window has been exceeded.

### Economical

Coverage rates of up to 10m<sup>2</sup> / litre for economical application. Application with a brush or roller allows fast application, and a cure time from as little as 4 hours allows roofs to be made watertight in short timeframes. Reduced project times and completing within schedule is critical to professional roofing contractors.

### Preparation

1. Test target surface to ensure substrate compatibility.
2. Ensure all surfaces to be primed are clean, dry and free from contamination prior to application.

### Application

1. Apply LQD-PUR Reactivator with a brush or roller, ensuring a uniform coverage of the substrate is achieved.
2. Allow primer to fully cure before applying LQD-PUR Liquid Waterproofing (4 hours dependent on ambient temperature). LQD-PUR Reactivator remains active for 48 hours following application. LQD-PUR Liquid waterproofing must be applied within this timeframe.

## Technical Data

|                                       |                              |
|---------------------------------------|------------------------------|
| LQD-PUR Reactivator Base Material     | Polyurethane                 |
| Appearance                            | Clear                        |
| Application Temperature               | 5 - 30°C                     |
| Temperature Resistance Range          | -30 - 140°C                  |
| Expected Cure Time (Per Coat) at 20°C | 4 Hours                      |
| Shelf Life                            | 12 Months                    |
| Storage Temperature                   | 5 - 25°C                     |
| Coverage                              | 6 - 10m <sup>2</sup> / Litre |
| Unit Size                             | 5 Litres                     |

## Notes

**Suitability:** Please contact Flex-R if you have any questions regarding specific substrates and their preparation.

**Substrate Quality:** The substrate must be solid and in a suitable condition prior to adhering and be able to resist any wind uplift forces.

**Storage and Handling:** The product should be stored unopened in a dry condition at a temperature of 5-25°C. This will ensure the stated shelf life. The product will have a limited life once the container is opened.

**Temperature and Timings:** All information on temperature and timings represents normal working conditions and is provided as a guideline only.

**Disclaimer:** Flex-R has taken care to ensure that the information provided in the literature is correct and up to date. However, it is not intended to form any part of a contract or provide a guarantee. Purchasers/intending purchasers should contact Flex-R to verify whether there have been any changes to the provided information since publication of the literature. Please ensure you have read the hazard labels and safety data sheet before using this product.